



LOCKOUT VALVES

PNEUMATICS



MEETS OSHA STANDARDS

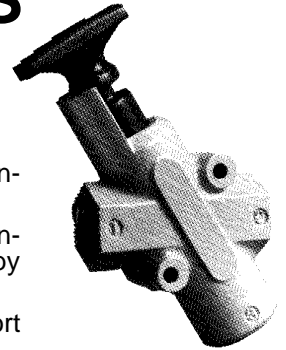

DESCRIPTION and APPLICATION

These 3-way valves are used in systems for compliance with **OSHA** standard 29 CFR 1910.147 for general safety.

By pushing the handle inward you block in-line pressure and relieve down-line system pressure after "locking" with a padlock, which ensures safety by preventing accidental actuation of cylinders.

By removing your padlock and pulling handle outward Port 1 is open to Port 2 for normal free flow of air through system at pressure.

The padlock capability ensures that only the authorized person can turn the system on and off.

STOCK NO. SD04500

3/8", 0-250 PSI,
ALUMINUM BODY

STOCK NO. SD04505

1/2", 0-250 PSI,
ALUMINUM BODY

STOCK NO. SD04508

3/4", 0-250 PSI,
ALUMINUM BODY

STOCK NO. SD04510

1", 0-250 PSI,

LOCKOUT VALVE				ORDER INFORMATION	
PORT SIZE	Cv PORT 1-PORT2	Cv PORT 2- PORT 3	REFERENCE	STOCK NUMBER	PRICE
3/8"	4.3	9.0	LV3NA8	SD04500	99.20
1/2"	7.7	11.3	LV4NA8	SD04505	99.20
3/4"	9.5	9.0	LV6NA8	SD04508	99.20
1"	10.2	8.8	LV8NA8	SD04510	136.30

BALL VALVE WITH LOCKOUT FEATURE

PNEUMATICS



INFORMATION & APPLICATION

Forged brass body, hard chrome plated full port ball designed to comply with OSHA standards 1910-147 requirements in pneumatic, hydraulic, and mechanical installations, latch-lock handle standard for positive lockout before maintenance is performed. Temperature range -4° to +350°F, .UL. A.G.A. C.G.A. O.S.H.A. approved.

BALL WITH VALVE LOCKOUT			ORDER INFORMATION	
PORT SIZE	PSI	REFERENCE	STOCK NUMBER	PRICE
1/4	200	948-131	3L01050	29.63
3/8	200	948-132	3L01060	29.63
1/2	200	948-133	3L01070	29.74
3/4	200	948-134	3L01080	37.73
1	200	948-135	3L01090	53.73

GRAND RAPIDS

TOLL FREE 1-800-968-0188
PHONE: (616) 949-8844
FAX: (616) 949-6598

KALKASKA

TOLL FREE 1-800-355-4338
PHONE: (616) 258-4338
FAX: (616) 258-2696