


ACCUMULATORS - PISTON TYPE

HYDRAULICS



"ECONOLATOR SERIES"



TOBUL
ACCUMULATORS

GENERAL INFORMATION

These permanently sealed accumulators are designed for systems with operating pressures up to 2500 psi. Each one is manufactured from heavy duty steel with welded end caps for rugged use. The hydraulically balanced aluminum piston with "T" Ring seal and a Teflon bearing is precision fitted into a "mirror-finished" cylinder.

APPLICATION

Some typical uses include: pressure storage units, pulsation dampeners, lift trucks, "cherry pickers" and other mobile equipment, machine tools, presses, circuit breakers, injection molding machines, power units, etc.

STOCK NO. 1L04080
1 PINT, 1/2" NPT, 2500PSI



STOCK NO. 1L04090
1 QUART, 1/2" NPT, 2500 PSI

STOCK NO. 1L04100
1 GALLON, 1" NPT, 2500 PSI

ACCUMULATOR - PISTON TYPE						ORDER INFORMATION	
FLUID CAPACITY	OIL CAPACITY CUBIC INCHES	WORKING PRESSURE	BURST PRESSURE	TEMP RANGE	REFERENCE	STOCK NUMBER	PRICE
1 PINT	29	2,500	10,000	-400-2000F	2.2AL-1	1L04080	200.57
1 QUART	58	2,500	10,000	-400-2000F	2.2AL-2	1L04090	219.14
1 GALLON	231	2,500	10,000	-400-2000F	4.5AL-8	1L04100	410.43

CHARGING HOSE AND GAUGE ASSEMBLY

HYDRAULICS

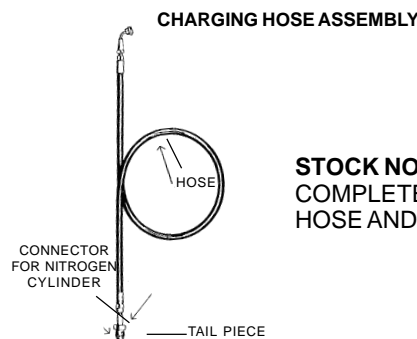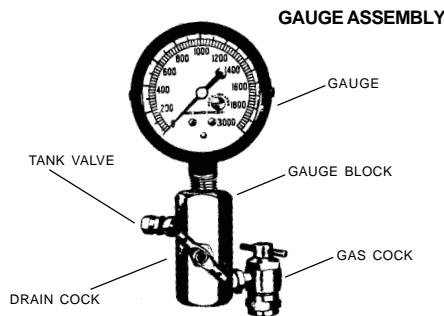

STOCK NO. AC01000
COMPLETE CHARGING
HOSE AND GAUGE ASSEMBLY

GENERAL INFORMATION

Gas precharge assembly features a 6 foot high-pressure, steel wire braid reinforced, synthetic rubber hose, and right hand cylinder connections with a heavy duty 3000 psi gauge.

CHARGING HOSE AND GAUGE ASSEMBLY			ORDER INFORMATION	
PARTS INCLUDED	REFERENCE	STOCK NUMBER	PRICE	
All parts in both components pictured above	GG2527F	AC01000	192.78	

NITROGEN CHARGING CAPABILITY

SUPPORT SERVICES

**WE WILL GO TO YOUR PLANT AND CHARGE YOUR ACCUMULATORS —
JUST ASK CUSTOMER SERVICE ABOUT OUR MOBILE RUSH REPAIR SERVICE.**

GRAND RAPIDS

TOLL FREE 1-800-968-0188
PHONE: (616) 949-8844
FAX: (616) 949-6598

KALKASKA

TOLL FREE 1-800-355-4338
PHONE: (616) 258-4338
FAX: (616) 258-2696